



SLA^{MAX}

FACTORY ACTIVATED

SLA MAX | PREMIUM QUALITY READY TO START

REF BIX30HL



12V VOLTAGE - V

400A CCA - A (EN)

31.6Ah CAPACITY - Ah (20Hr)

30Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- Factory activated : Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- Increased power & Extended life
- Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling - Very safe


UPGRADE FOR

BB30L-B ; BIX30L-BS ; BIX30L

WEIGHT


Battery (with acid) : approx 9.83kg

MOUNTING ANGLE

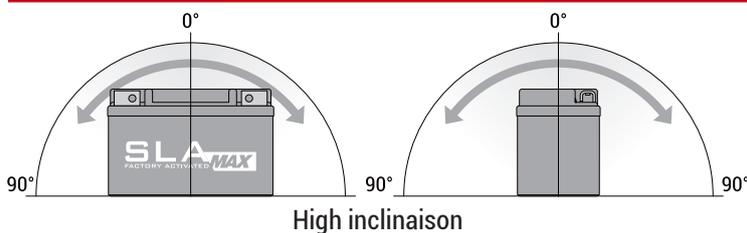


DIMENSIONS

Length (A) :	166mm (±2mm)
Width (B) :	130mm (±2mm)
Container height :	175mm (±2mm)
Total height (C) :	175mm (±2mm)

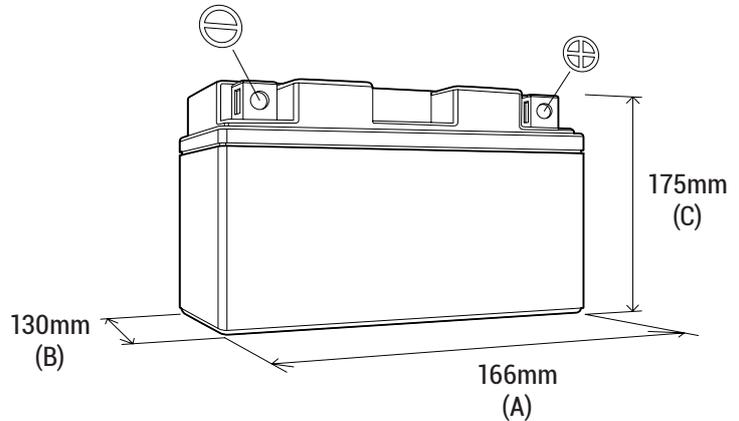


TERMINALS



FRONT



SIDE



TOP